



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91229

SWITCH-BASIC

CATALOG LISTING

12BS201

12BS201

M

DRAWING NUMBER

6

ISSUE

REPLACES

SR12355

RELEASE NO.

CHECK

21 AUG 63

EB

CHECK

21 AUG 63


DAW

CHECK

21 AUG 63

MBF

FORMTEK

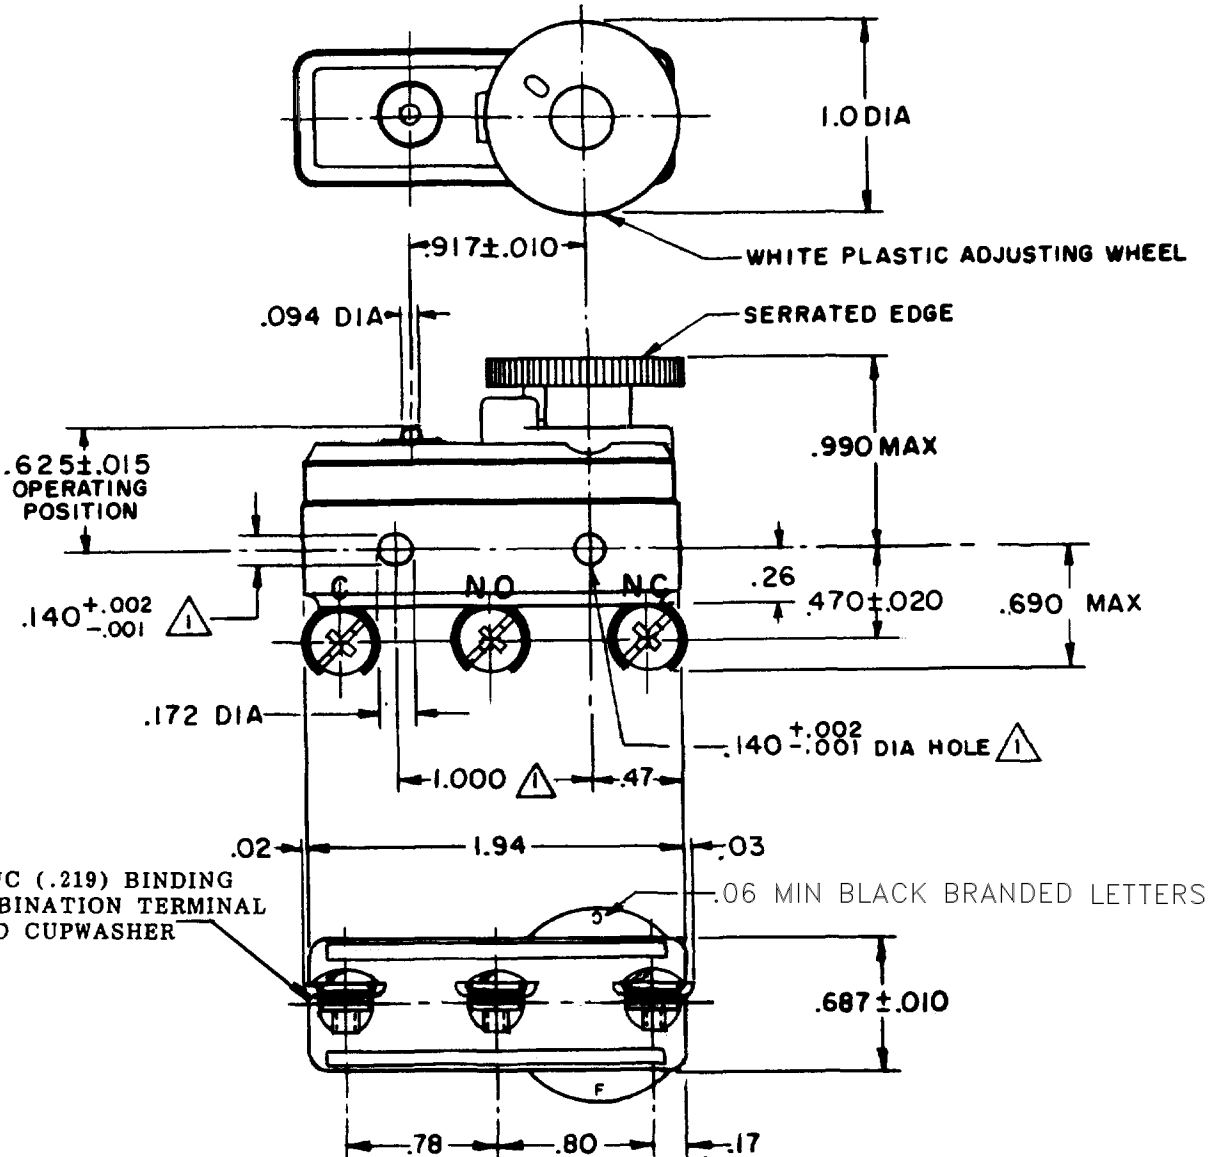

NOTE -

- ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.139$ MAX DIA ON $1.000 \pm .002$ CENTERS
- 2 - DIAL WHEEL IS SHOWN AT THE MAX SETTING OF BREAK DISTANCE
- 3 - DIAL WHEEL ROTATION 300°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO.; THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
AT MIN SETTING OPERATING FORCE ----- 6-10 OZ RELEASE FORCE ----- 4 OZ MIN DIFFERENTIAL TRAVEL ----- .0002-.0005 OVERTRAVEL ----- .005 MIN	CONTACT ARRANGEMENT S P D T UNDERWRITERS' LAB. INC. LISTED RATINGS 15A-125, 250 OR 277 VAC - LIII - 1/8 HP - 125 VAC; 1/4 HP - 250 VAC	DO NOT SCALE PRINT UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES \pm
		WEIGHT